



AXLE STANDS

Car stands to secure loads, as an indispensable safety measure. Providing great stability and wide feet to protect the workshop floor. The pin can rest on the base or go through it.

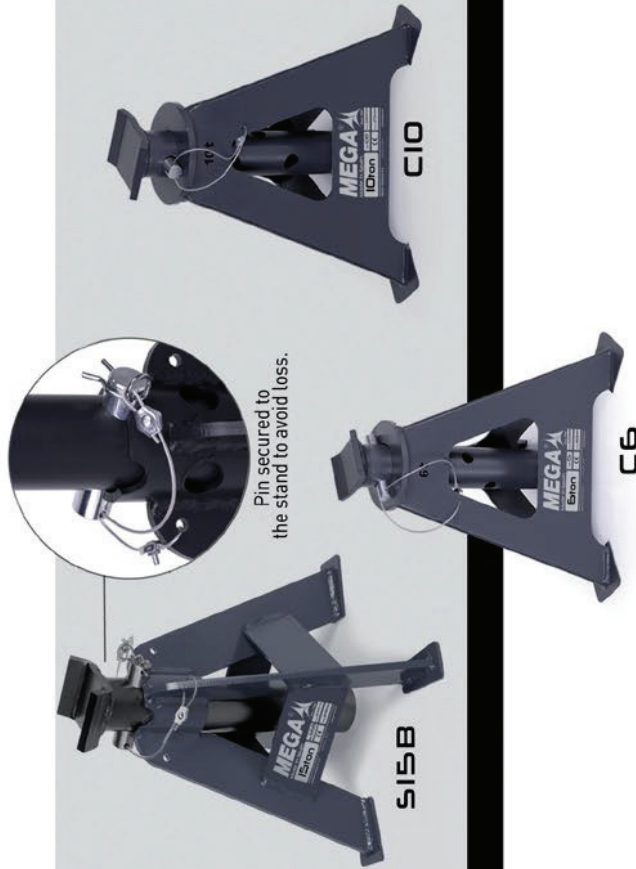

Pin secured to the stand to avoid loss.

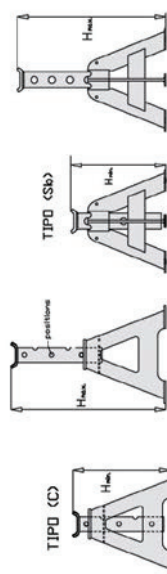

REF.:	Cap. (t)	H min.	H max.	Nº posit.	Weight (kg)
C6	6	360	520	5	6
C10	10	375	550	5	10,5
S15B	15	340	532	4	9,3

Axle stands

15


Toe jack

TOE JACK

MGL10 is the combination of BL10 heavy-duty structure and BR10 bottle jack. (Can also be used with BR8 bottle jack). Ideal for difficult lifting, supporting, levelling or positioning of fork-lifts, heavy machines and numerous jobs where space is tight. The toe is detachable and adjustable to 2 fixing positions.




Extra low profile lifting toe (25 mm).

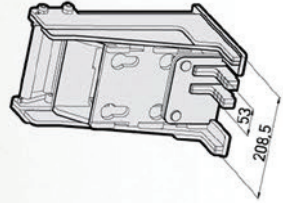

BL10

Position 1:
Extremely low pick up point.

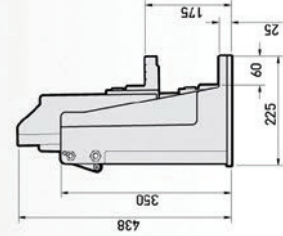

Position 2:
For higher pick up point.

